

P25 Conventional and Trunking Smallest and Lightest of Its Class

The IC-F7040 series are small and lightweight P25-compliant 700/800 MHz radios and can be upgraded to Phase 1 trunking and Phase 2 trunking with a license key. The radios offer rugged durability and IP68 submersible protection, and are easy to use with a high visibility color LCD screen. Plus the GPS receiver, Bluetooth® and microSD card slot come standard.

▮ P25 Phase 1 conventional, trunking* and Phase 2 trunking* capable

▮ Optional FIPS compliant AES encryption unit*

▮ P25 voting scan* (P25 conventional mode)

▮ Up to 1024 channel capacity with 128 zones

▮ IP68 waterproof protection (1 m depth/1 hour)

▮ High visibility and readability with a color LCD

▮ Icom's custom high power handling capacity speaker for 1300 mW of powerful audio

▮ Built-in Bluetooth®, voice recording and P25 packet data (GPS)* functions

▮ Enhanced dual-rate AMBE+2™ Vocoder

▮ Battery information display by the intelligent battery pack

* License key upgrade required




IC-F7040T

IC-F7040S

FEATURES**General Features**

- 700/800 MHz frequency bands
- 1024 channels / 128 zones
- High resolution color LCD with intuitive user interface
- Day and night mode display settings

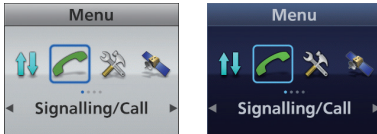

Day and night mode example

- Functions and menu items can be set in a language other than English (For example French, Spanish, Russian, and Traditional Chinese)
- 16-position rotary selector and ON/OFF volume knob
- Quick A/B switch on the top panel programmable for various functions such as zone, scrambler/encryption, and so on.
- 1300 mW loud and intelligible internal speaker audio
- MIL-STD-810 G such as shock, vibration and temperature
- IP68, one meter depth for one hour waterproof and dust-tight protection
- 38.2 mm (1.5 inch) slim dimensions (With BP-284 battery pack)
- Battery information display
- Flat sheet keypad offers large button space and protects the radio from dust
- Front panel programming option (ISL-P25FP License key required)
- Fast wake up time from the power save mode
- DTMF autodial

Operating Mode

- P25 Phase 1 conventional
- P25 Phase 1 trunking (ISL-P25TR License key required)
- P25 Phase 2 trunking (ISL-P25P2 License key required)
- Analog mode
- Analog/digital mixed operation

Digital Functions (Voice and Data)

- Over-the-Air Programming (OTAP) function (CS-OTPM2 manager software required)
- Individual, group call
- Unit ID and talkgroup display on receive
- Status update and status query
- Short data messages of up to 100 characters
- GPS position and transparent data transmission (ISL-P25DS License key required)
- Call alert
- Phone number list
- Call log

Analog Functions

- CTCSS and DTCS tone
- 2-Tone
- MDC functions

Security and Safety

- Optional UT-125FIPS FIPS compliant AES/DES encryption unit and UT-134 non-FIPS AES/DES unit (ISL-P25AES License key required for AES encryption)
- Over-the-Air Rekeying (OTAR)
- Analog inversion voice scrambler (16-codes)
- Power ON password
- Tactical group temporarily regroup user groups
- Radio Stun/Kill/Revive
- Remote monitor • Radio check
- Emergency key for emergency call
- Man Down function • Lone Worker function
- Motion/stationary detection
- External emergency button with optional HM-222
- Advanced System Key (ASK) protects the radio from unauthorized programming

Scan Functions

- Priority scan • Talkgroup scan
- Voting scan for automatically selecting optimal repeater site (ISL-P25VS License key required)

Voice/Audio Functions

- Voice announcement (Channel number and zone)
- VOX function for hands-free operation
- Voice recording/playback is saved to a microSD card (Up to 500 hours with a 32 GB card) (User supplied)
- TX/RX active noise canceller
- TX/RX audio equalizer (Flat, high/mid/low boost, low cut)
- AF volume equalizing function adds high-pass filter to provide clear, intelligible audio, when increases the volume
- Adjustable analog and digital volume level

Hardware Features

- Programmable vibration alert and ringer beep
- Built-in Bluetooth® for wireless audio and data
- Third-party wireless Bluetooth® headset (Like a 3M™ Peltor™ WS™ 5) can be used
- Wireless radio programming over Bluetooth®
- USB connector for data transfer mode or card reader mode
- 14-pin accessory connector
- Built-in GPS with GPS position screen
- Internal clock with time auto adjustment
- Optional BC-225 intelligent charger and RS-BC225 reader software for BC-225 for battery life cycle management

SPECIFICATIONS

		IC-F7040T/S
GENERAL		
Frequency coverage (* Depends on the transceiver version)	USA	769–775 (RX/TX), 799–805 (TX), 806–824 (TX), 851–869 (RX/TX) MHz
	EXP	764–776 (RX/TX), 794–806 (TX), 806–825 (TX), 851–870 (RX/TX) MHz
Number of channels		1024 channels /128 zones
Type of emission (* Depends on the transceiver version)		16K0F3E, 14K0F3E, 11K0F3E, 8K50F3E, 8K10F1E/F1D, 8K10F1W
Power supply requirement		7.5 V DC nominal
Current drain (approximate)	TX	1.6 A
	RX	620 mA /220 mA (Max. audio (internal SP)/Standby)
Antenna impedance		50 Ω
Operating temperature range		–30 °C to +60 °C, –22 °F to +140 °F (Radio specifications)
Dimensions (W × H × D, Projections not included)		53.6 × 123.5 × 38.2 mm, 2.1 × 4.9 × 1.5 in (With BP-284)
Weight (approximate)		180 g, 6.4 oz (main unit)
		345 g, 12.2 oz (BP-284, MB-133, FA-S100U)
TRANSMITTER		
Output power (Hi)		3 W
Maximum frequency deviation		±5.0 kHz (25 kHz), ±4.0 kHz (20 kHz), ±2.5 kHz (12.5 kHz)
Frequency stability		±1.0 ppm
Spurious emissions		70 dB minimum
FM hum and noise		55 dB typical
Audio harmonic distortion		1.5% typical (AF 1kHz 40% deviation)
FSK error		1% typical
RECEIVER		
Sensitivity	Analog (12 dB SINAD)	0.25 μV typical
	Digital (5% BER)	0.25 μV typical
Adjacent channel selectivity	Analog	75/75/53 dB typical (25/20/12.5 kHz, TIA-603B)
	Digital	75/75/72 dB typical (25/20/12.5 kHz, TIA-603)
Spurious response rejection		60 dB typical (TIA-102)
Intermodulation rejection		70 dB minimum
Audio output power	Internal SP	1300 mW typical (at 5% distortion with an 8 Ω load)
	External SP	1000 mW typical (at 5% distortion with an 8 Ω load)

Measurements made in accordance with TIA-102 (P25), TIA-603 (FM wide/middle/narrow).

All stated specifications are subject to change without notice or obligation.

Applicable U.S. Military Specifications & IP Rating

Standard	MIL 810G	
	Method	Procedure
Low Pressure	500.5	I, II
High Temperature	501.5	I, II
Low Temperature	502.5	I, II
Temperature Shock	503.5	I-C
Solar Radiation	505.5	I
Rain Blowing/Drip	506.5	I, III
Humidity	507.5	II
Salt Fog	509.5	–
Dust Blowing	510.5	I
Immersion	512.5	I
Vibration	514.6	I
Shock	516.6	I, IV

Also meets equivalent MIL-STD-810-C, -D, -E and -F.

Ingress Protection Standard	
Dust & Water	IP68 (Dust-tight and waterproof protection)

Battery Life

Battery pack	Type	Capacity	Operating time* (Approx.)
BP-283	Rechargeable Li-ion	2010 mAh (typ.), 1910 mAh (min.)	9 hours
BP-284	Rechargeable Li-ion	3210 mAh (typ.), 3070 mAh (min.)	14 hours

* Tx: Rx: standby = 5:5:90 duty cycle.

Supplied accessories: (May differ, depending on transceiver version)
 • Battery pack, BP-284 • Belt clip, MB-133

OPTIONS

■ BATTERY PACKS

BP-283: Rechargeable Li-ion battery. 2010 mAh (typical), 1910 mAh (minimum). IP68 protection.

BP-284: Rechargeable Li-ion battery. 3210 mAh (typical), 3070 mAh (minimum). IP68 protection.



BP-283 BP-284

■ BATTERY CHARGERS

BC-225: Intelligent charger. Shows the charging information with LED lighting. Charges the BP-283/BP-284 in 2.5/4.5 hours (approximate).

+ **BC-123SA/SE:** AC adapter.

RS-BC225: Reader software for BC-225. Windows® PC software.

BC-227: Compact type desktop charger. Charges the BP-283/BP-284 in 2.7/4.3 hours.

+ **BC-123SA/SE:** AC adapter.

BC-219N: Desktop charger. Charges the BP-283/BP-284 in 2.8/4.5 hours (approx.).

+ **BC-123SA/SE:** AC adapter.

BC-214: Multi-charger. Charges up to six BP-283/BP-284 batteries in 2.8/4.5 hours (approx.).

+ **BC-157S:** AC adapter.

* AD-132N charger adapter is supplied with the BC-214, depending on version.



BC-123S

BC-225

BC-227

BC-219N

BC-214

BC-157S

No.	Battery Name	Charge Mode	Icon	Charge Time	Vol.
001	BP-283	Charge	ON	2.5	3.7
002	BP-284	Charge	ON	4.5	3.7
003	BP-283	Charge	OFF	3.0	3.7
004	BP-284	Charge	OFF	4.0	3.7

RS-BC225

■ POWER SUPPLY CABLES

CP-23L: Vehicle charger cable for use with the BC-219N or BC-227.

OPC-515L: DC power cable for use with the BC-219N, BC-225 or BC-227.

OPC-656: DC power cable for use with the BC-214.

■ SPEAKER-MICROPHONES

HM-222: Speaker microphone with an emergency button and a 3.5 mm earphone jack. IP68 protection.

HM-163MC: Tie-clip microphone with a 2.5 mm earphone jack.

EH-15B: Earphone with a 2.5 mm plug for use with the HM-163MC.

SP-28: Earhook type earphone with a 2.5 mm plug for use with the HM-163MC.

SP-32: Tube earphone adapter for use with the EH-15B.

SP-27: Tube earphone with 3.5 mm plug. For use with the HM-222 or AD-135.

SP-29: Earhook type earphone with 3.5 mm plug. For use with the HM-222 or AD-135.

SP-40: Earphone with 3.5 mm plug. For use with the HM-222 or AD-135.



HM-222

HM-163MC

EH-15B

SP-28

SP-32

SP-27

SP-29

SP-40

■ HEADSETS AND PTT SWITCH CABLE

HS-94: Earphone-headset. VS-5MC is required.

HS-95: Behind-the-head headset. VS-5MC is required.

HS-97: Throat microphone. VS-5MC is required.

VS-3: Bluetooth headset.

VS-5MC: PTT switch cable with VOX function. VS-5MC is required when using any of HS-94, HS-95 or HS-97.



HS-94

HS-95

HS-97

VS-3

VS-5MC

■ BELT CLIPS, BELT HANGERS AND CARRYING CASE

MB-133: Alligator belt clip. Same as supplied.

MB-136: Swivel belt clip.

MB-96N: Swivel type belt hanger.

MB-96F: Fixed type belt hanger. For use with the MB-133.

MB-96FL: Long fixed type belt hanger. For use with the MB-133.

LC-184: Carrying case.



MB-133

MB-136

MB-96N

MB-96F

MB-96FL

LC-184

■ AES/DES ENCRYPTION UNITS

UT-134: AES/DES encryption unit.

UT-125FIPS: AES/DES encryption unit (FIPS compliant).



UT-134

UT-125FIPS

■ OTHER OPTIONS AND CABLES

AD-135: 3.5 mm earphone jack adapter for use with any of SP-27, SP-29 or SP-40 earphone.

AD-118: ACC adapter. For use with a Hirose plug accessory.

OPC-2338: Programming cable. USB-14-pin type.

OPC-1870: Zone copy cable. Handheld to handheld cable.

OPC-2362: Zone copy cable. Handheld to mobile cable.

FA-S100U: 700/800 MHz antenna.



AD-135

AD-118

OPC-1870

OPC-2362

FA-S100U

■ SOFTWARE AND ACTIVATION KEYS

CS-F7500: Programming software.

CS-OTPM2: OTAP manager software.

ISL-P25VS: P25 conventional voting scan upgrade key.

ISL-P25TR: P25 Phase 1 trunking upgrade key.

ISL-P25P2: P25 Phase 2 trunking upgrade key.

ISL-P25DS: P25 packet data service (GPS and transparent data) upgrade key.

ISL-P25AES: AES encryption upgrade key. Either UT-134 or UT-125FIPS is required.

ISL-P25FP: Front panel programming key.

Some options may not be available in some countries. Please ask your dealer for details.

Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand and/or other countries. The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Icom Inc. is under license. Windows is either a registered trademark or a trademark of Microsoft Corporation in the United States and/or other countries. AMBE+2 is a trademark and property of Digital Voice Systems, Inc. 3M, Peltor, and WS are trademarks of 3M Company. All other trademarks are the properties of their respective holders.

Icom Inc. 1-1-32, Kamiminami, Hirano-Ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

www.icom.co.jp/world

Count on us!

Icom America Inc.
www.icomamerica.com

Icom (Europe) GmbH
www.icomeurope.com

Icom (Australia) Pty. Ltd.
www.icom.net.au

Your local distributor/dealer:

Icom Canada
www.icomcanada.com

Icom Spain S.L.
www.icomspain.com

Shanghai Icom Ltd.
www.bjicom.com

Icom Brazil
E-mail: sales@icombrasil.com

Icom (UK) Ltd.
www.icomuk.co.uk

Icom France s.a.s.
www.icom-france.com